

SANKO FRET-WIRE

Specification


Material : Nickel Silver
Model type : See following pages
Hardness : HV-110-200 (5 level)
Dimple spacing 2.5mm







Specification of precut fret






Since this type of fret wire is cut by our specially developed precision cutter, a cross section of this fret wire is more accurate, looks more attractive, and contributes more to efficiency compared to other products currently available. Fill out the box of requesting form page for placing orders or inquiries.






Cut length : 15-150mm
(Both edges to be notched or not)
Finger board radius : 180-800mm

A special spring (Coil insert) to prevent the bolt or screw from being loosening by shock is also available.

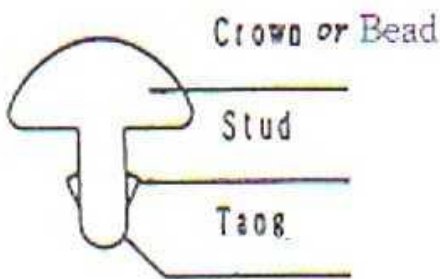

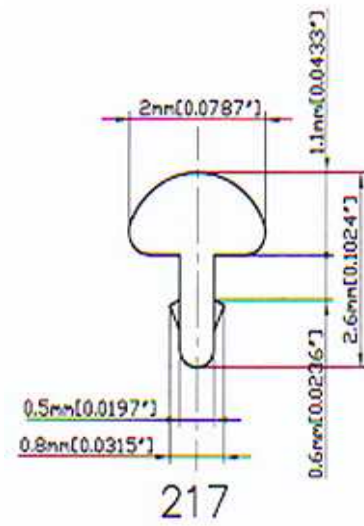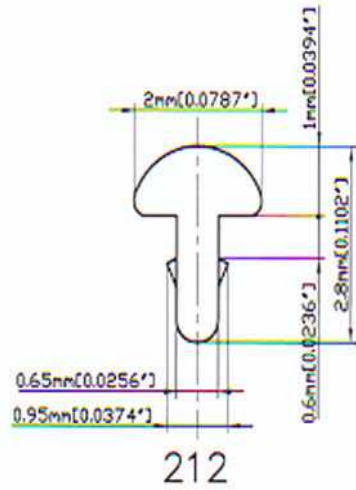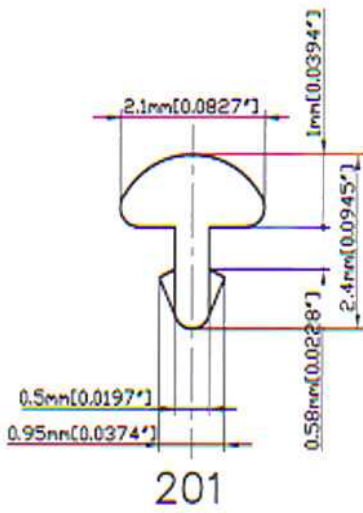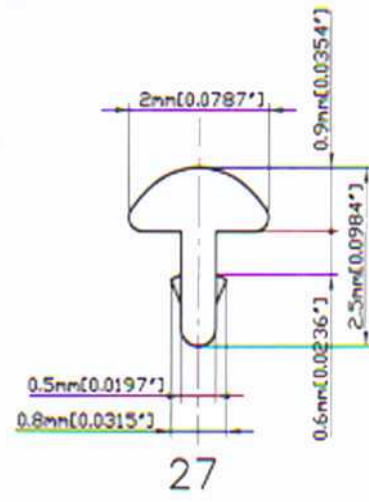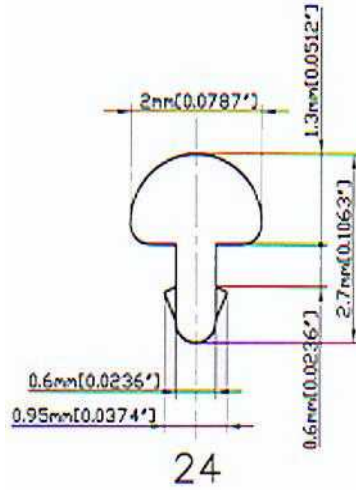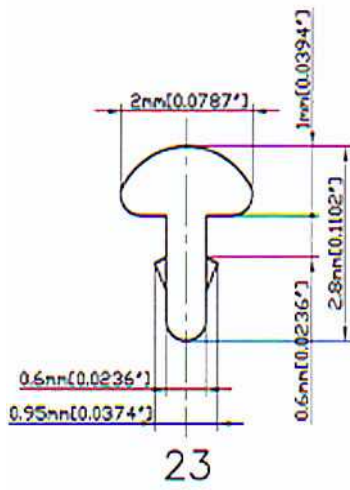

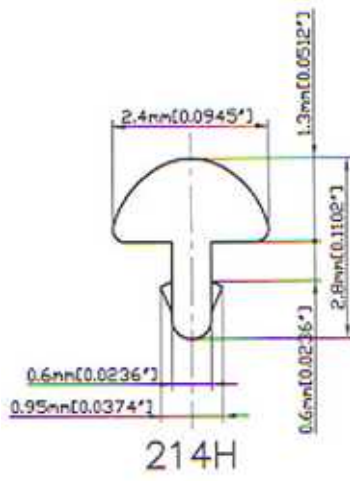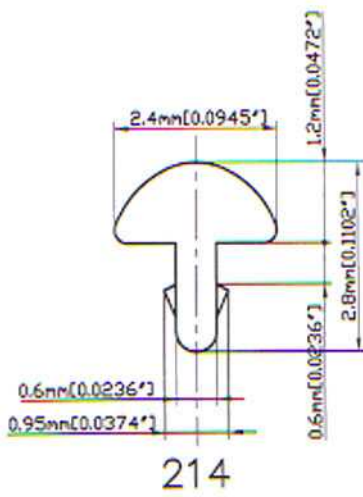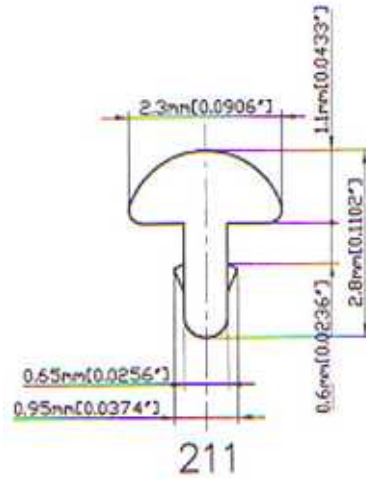
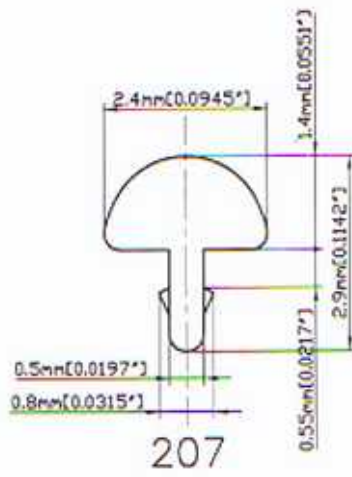
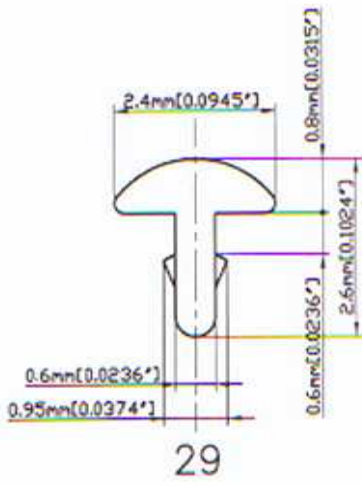


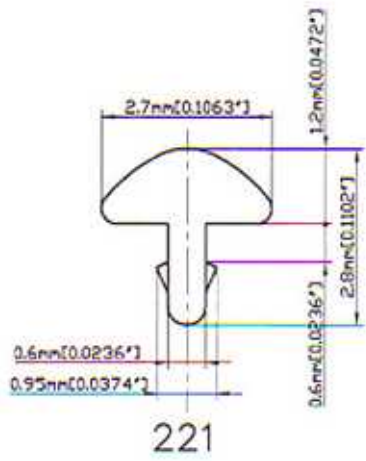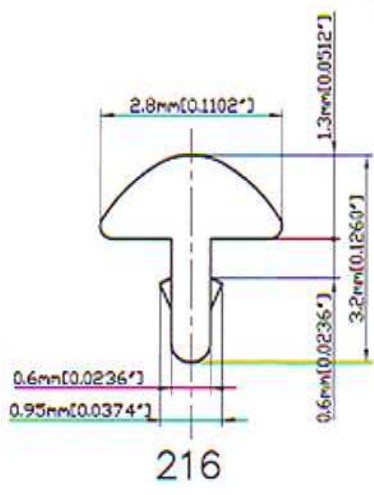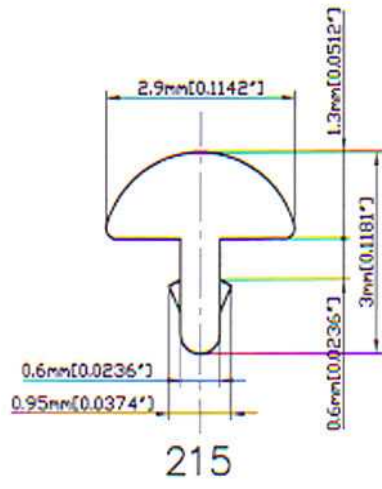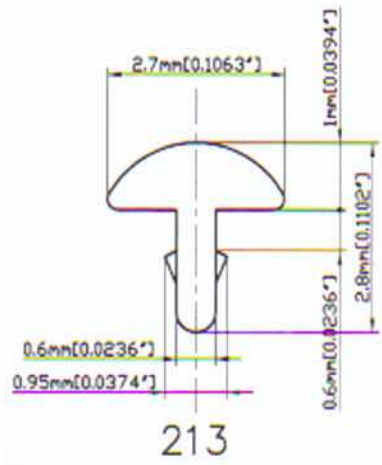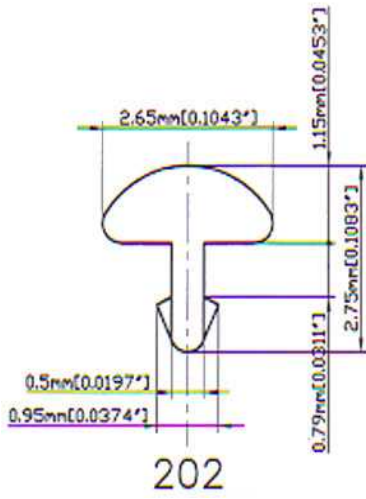





Light Gauge Fret Wire
Mandolin, Ukulele, Banjo, Dulcimer, Taishokoto


SBU

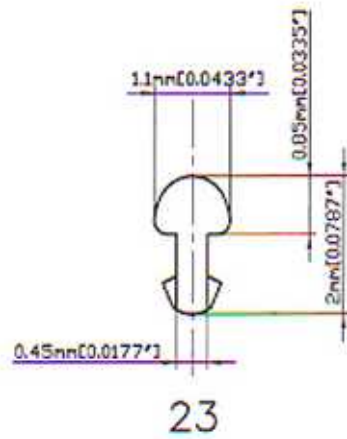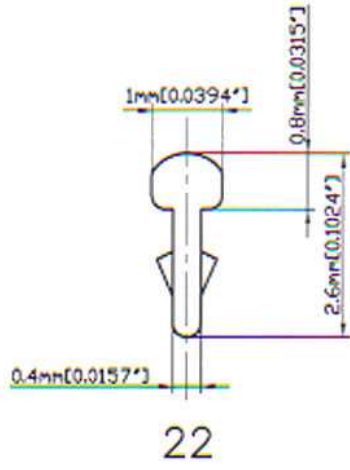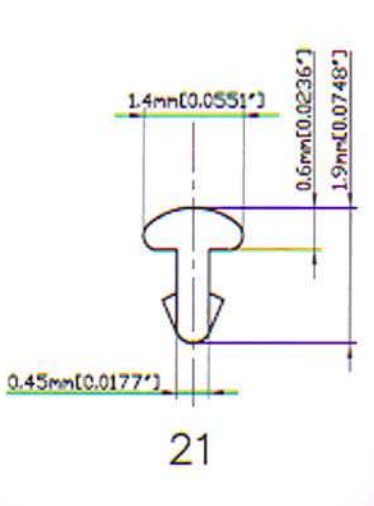

SDU

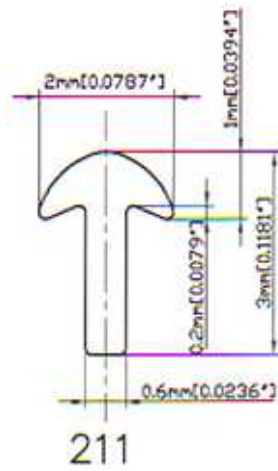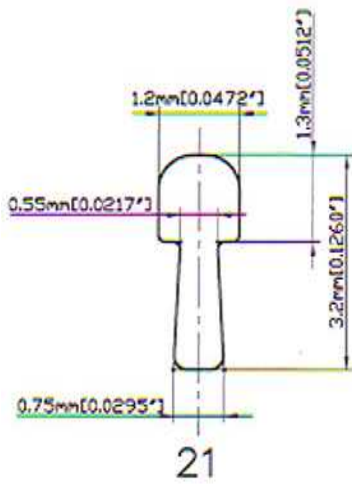


**REQUESTING FORM
FOR ESTIMATION OF "PRECUT"**

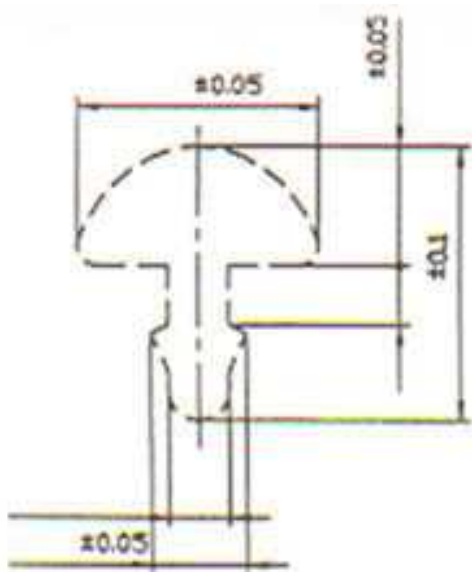

Model type :

No. SBB
 SBU
 SDU

Hardness

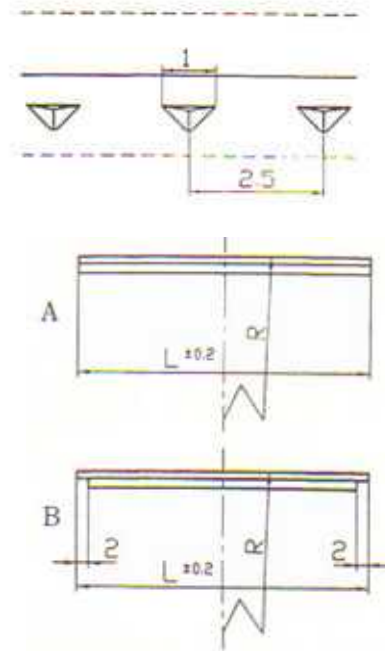

Both edges to be notched
or not

A or B

Finger, board radius

R

Fret No.	Length	Q'ty	Fret No.	Length	Q'ty
1			16		
2			17		
3			18		
4			19		
5			20		
6			21		
7			22		
8			23		
9			24		
10			25		
11			26		
12			27		
13			28		
14			29		
15			30		