

# SANKO FRET-WIRE

## Specification



Material : Nickel Silver  
 Model type : See following pages  
 Hardness : HV-110-200 (5 level)  
 Dimple spacing 2.5mm

## Specification of precut fret







Since this type of fret wire is cut by our specially developed precision cutter, a cross section of this fret wire is more accurate, looks more attractive, and contributes more to efficiency compare to other products currently available, Fill out the box of requesting form page for placing orders or inquiries.






Cut length : 15-150mm  
 (Both edges to be notched or not)  
 Finger board radius : 180-800mm






A special spring (Coil insert) to prevent the bolt or screw from being loosening by shock is also available.

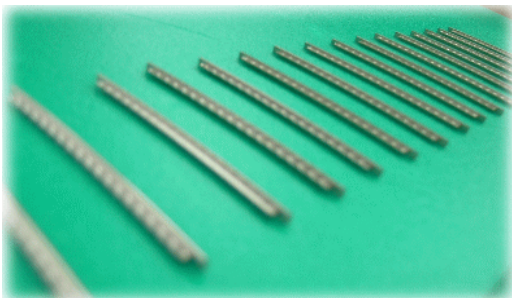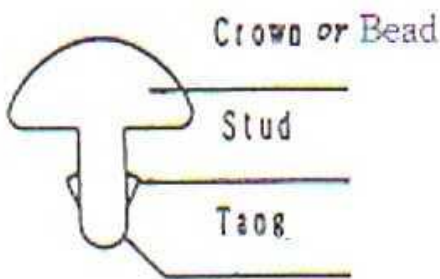

**SS SERIES**  
SBB

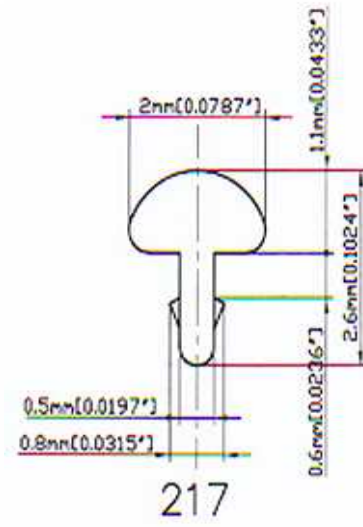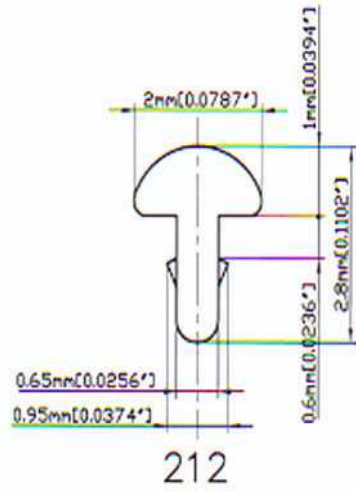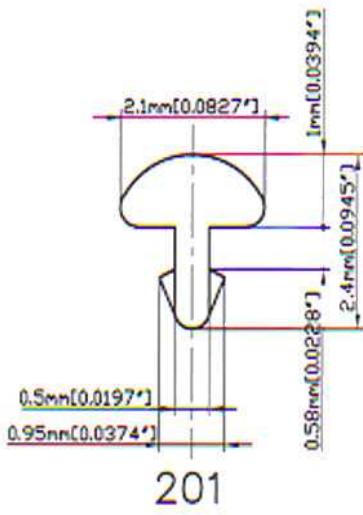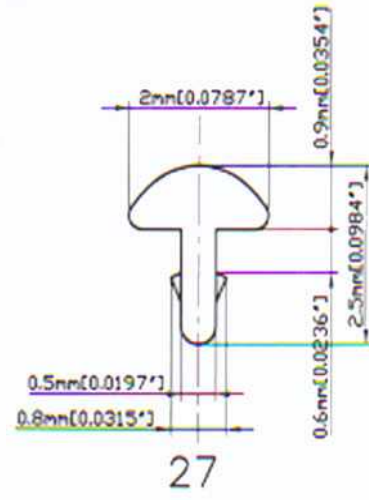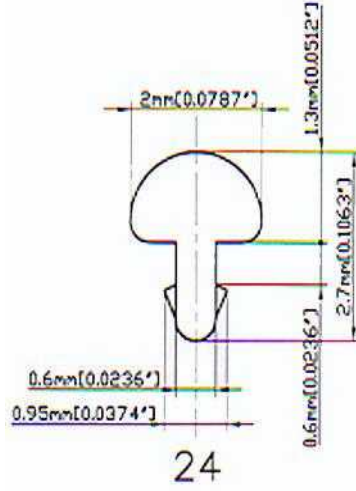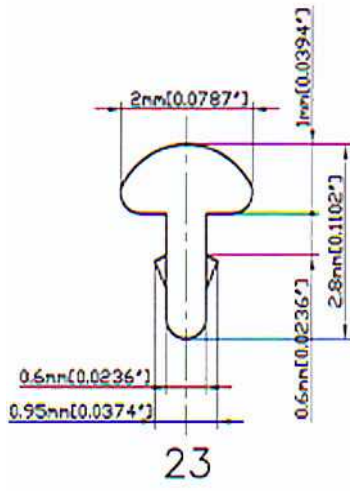

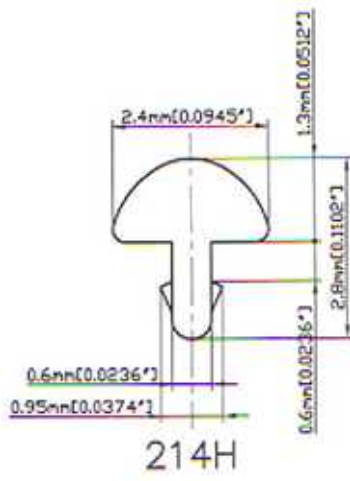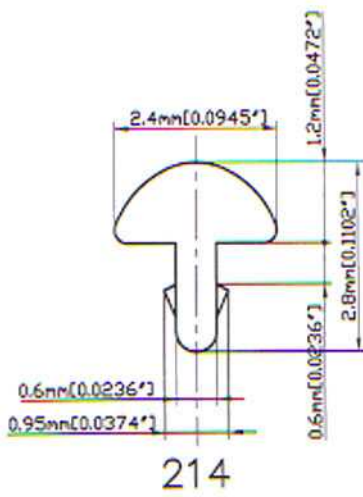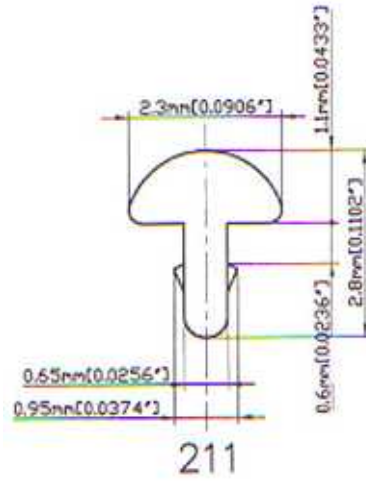
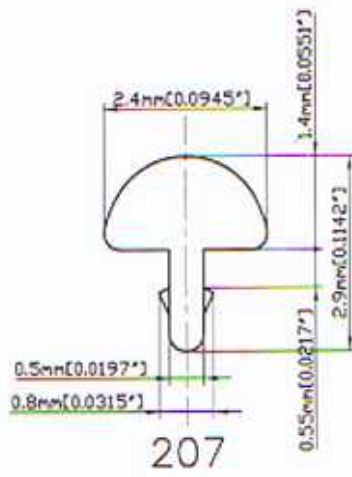
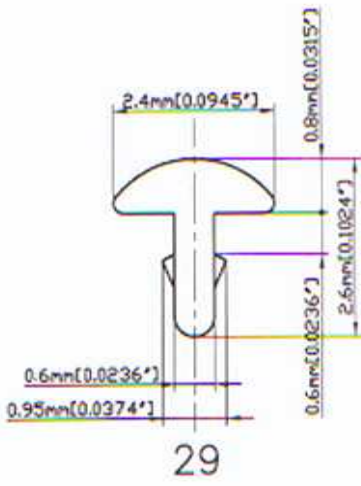


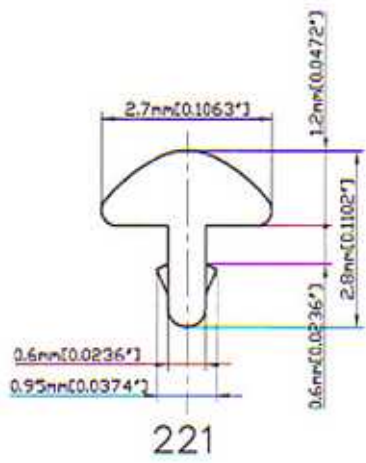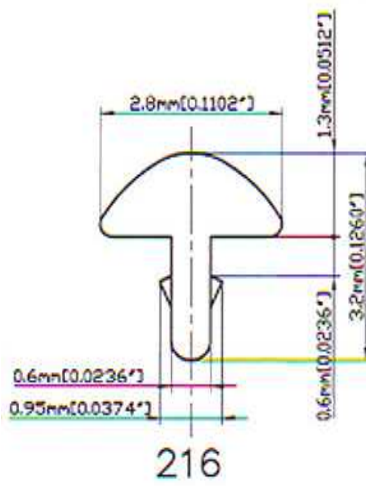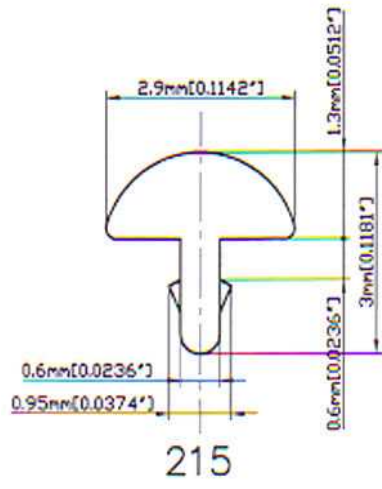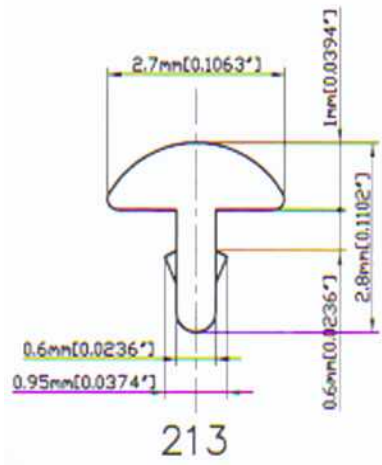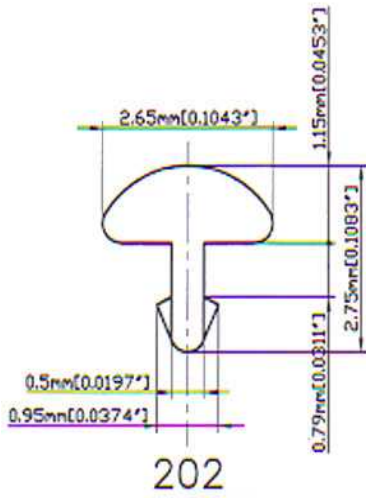





Light Gauge Fret Wire  
Mandolin, Ukulele, Banjo, Dulcimer, Taishokoto



SBU

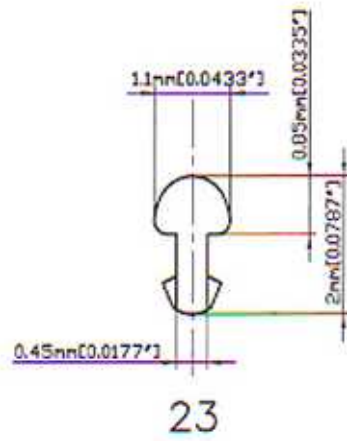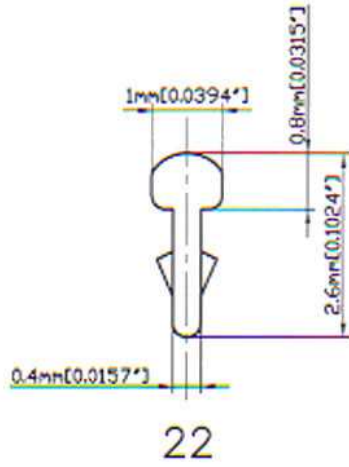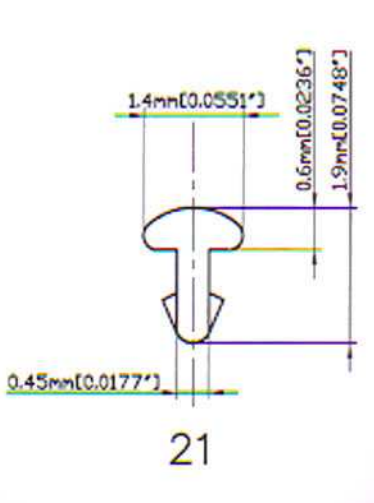

SDU

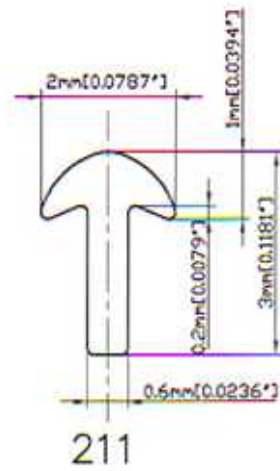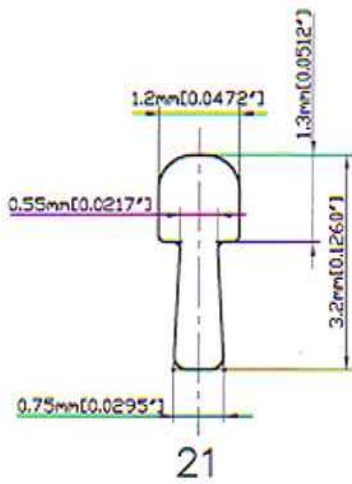

**REQUESTING FORM  
FOR ESTIMATION OF "PRECUT"**

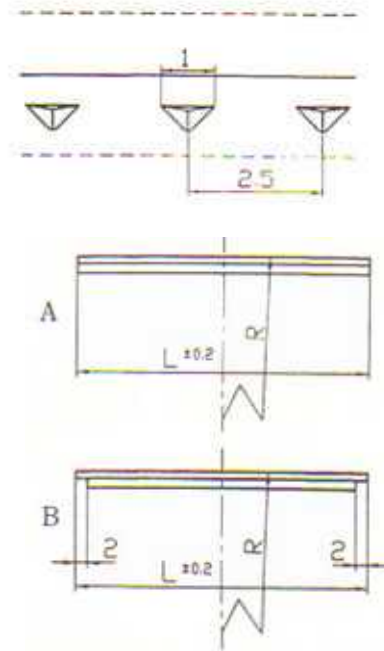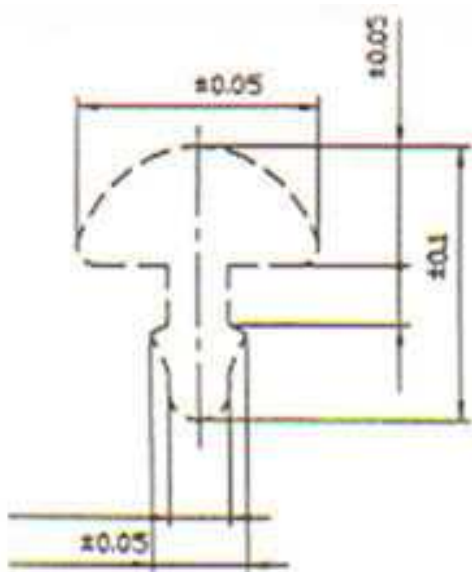

Model type :

No.      SBB  
            SBU  
            SDU

Hardness

Both edges to be notched  
or not

A            or            B

Finger, board radius

R

Fret No.	Length	Q'ty	Fret No.	Length	Q'ty
1			16		
2			17		
3			18		
4			19		
5			20		
6			21		
7			22		
8			23		
9			24		
10			25		
11			26		
12			27		
13			28		
14			29		
15			30		